

ALLIANCE

Specification Sheet


Project:

Type:

Model: bt-RE (bt Range Extender)

Fixture Height: 8.25 in. (20.95 cm)

Fixture Width: 2 in. (5.08 cm)

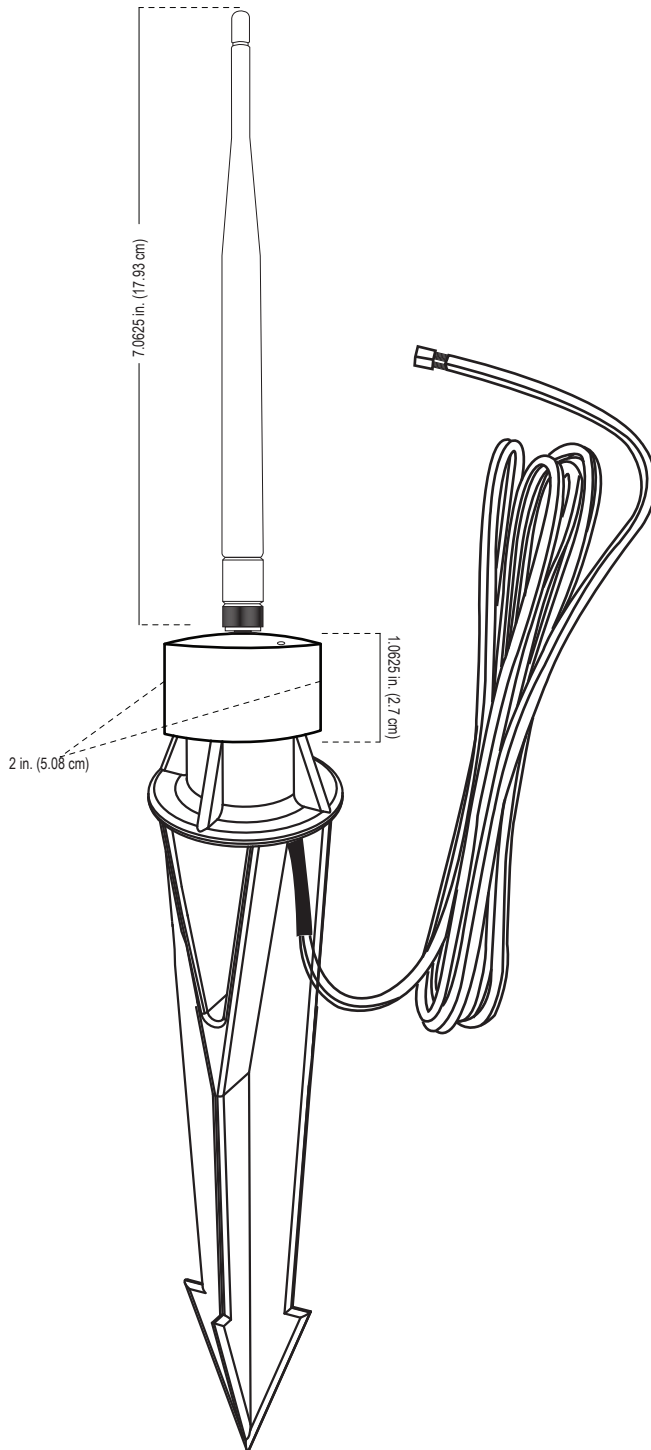

Notes:

Description:

Range extender for bt products in the same network. Extender must be added to a secured network through the bt app. Multiple networks require multiple range extenders.

Fixture Features:

Body: Solid brass with an aged brass finish

Antenna: External, 5 dB, 2.4 GHz

Wire: 10' wire lead, 16 awg (UL listed), brown, pre-stripped for easy wire connection

Stake: Plastic ground stake, attached to the fixture (8.5 in; 21.6 cm length)

Warranty: Ten Year Warranty

Specifications:

Wattage: 1 watt

Operating Voltage Range: 10v - 24v

Works With: ALLIANCE bt products and phone app

Compatible Wireless Applications: Bluetooth Mesh®

Available Accessories:

RMB: Round Mounting Base

DL-Bracket: Down Light Bracket

GUTTERMOUNT: Gutter mount

Installation:

Use waterproof connectors and wire into the existing system.

Install in areas where a distance gap between fixtures is present.

Range Extender must be added to the same network as the bt fixtures in order to work properly.

Signal range increases in higher areas above ground.