


# Model: FL50-bt (Bluetooth Flood Light)

Fixture Height: 2 in. (5.08 cm) Fixture Width: 4 in. (10.16 cm) Fixture Depth: 2.25 in. (5.71 cm) Base Height: 1.5 in. (3.81 cm)

Notes:

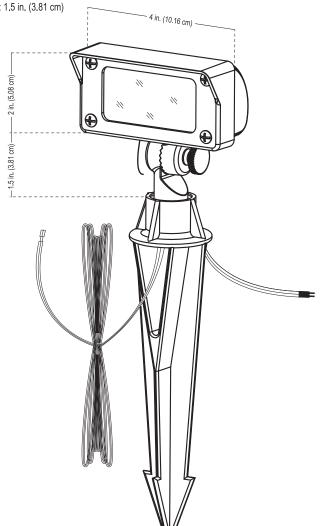

Project: Type:

### Specifications and Features:

Body: Brass fixture, aged brass finish

Knuckle: Solid brass knuckle with dial adjustment

Face plate: Brass face plate with rubber gasket attached to fixture with 4 screws

Lens: Clear lens

Wire: Industry First, double wire lead pre-connected to the fixture, 16 awg (UL listed), brown

-25 foot wire lead, pre-stripped for easy wire connection

-18 inch wire lead, LED connection ready

Stake: Plastic ground stake, attached to the fixture (8.5 in; 21.6 cm length)

Warranty: Ten Year Warranty on Integrated Fixture

Certification: Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7.

Identified with the ETL and cETL Listed Mark.

# Integrated LED Features:

Wattage: 2w - 5w

Operating Voltage Range: 10v - 14v Lumen Output: 15lm to 350lm

Beam Spread: 120°

**CRI**: 80

CCT Options: Preset options for 2700K, 3000K, 4000K

RGB Options: Unlimited Color Wheel Options with quick preset options for

Red, Green, Blue, Amber and Purple

Dimming: Dimming option available for every color choice

Scenes: Customizable scene options with up to 3 colors per scene

## Accessories Available:

Mounting Accessories:	
RISER6 - 6" brass riser, aged brass finish	
RISER12 - 12" brass riser, aged brass finish	
RISER18 - 18" brass riser, aged brass finish	
RISERADJ - Adjustable plastic riser, aged brass cap	
RMB - Round Mounting Base	
GUTTERMOUNT	