ALLIANCE
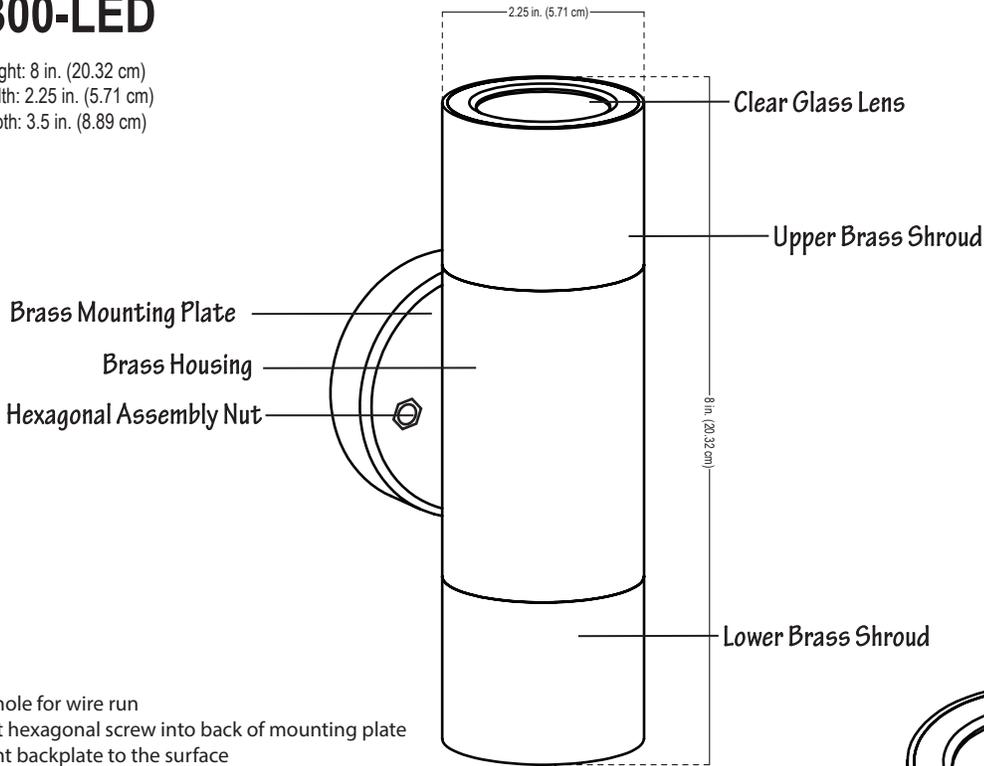
WS300-LED

Fixture Height: 8 in. (20.32 cm)
Fixture Width: 2.25 in. (5.71 cm)
Fixture Depth: 3.5 in. (8.89 cm)

2.25 in. (5.71 cm)

Clear Glass Lens

Upper Brass Shroud

Brass Mounting Plate

Brass Housing

Hexagonal Assembly Nut

8 in. (20.32 cm)

Lower Brass Shroud

1. Drill hole for wire run
2. Insert hexagonal screw into back of mounting plate
3. Mount backplate to the surface
4. Feed wire through backplate and mounting surface
5. Fasten hexagonal nuts to hexagonal screws (from step 2)

Hexagonal
Assembly Nuts

Mounting Surface

Mounting Screws

Mounting Backplate

Wire Lead

5.

4.

1.

3.

3.

2.

Dual Socket Assembly

Hexagonal Assembly Screws

Power Supply

A-LOC Waterproof
Connectors