


ALLIANCE

Specification Sheet

Model: WL100 (PAR36 Well Light)

Fixture Height: 8.75 in. (22.22 cm)
 Can Diameter: 5.5 in. (13.97 cm)
 Grate Diameter: 6 in. (15.24 cm)

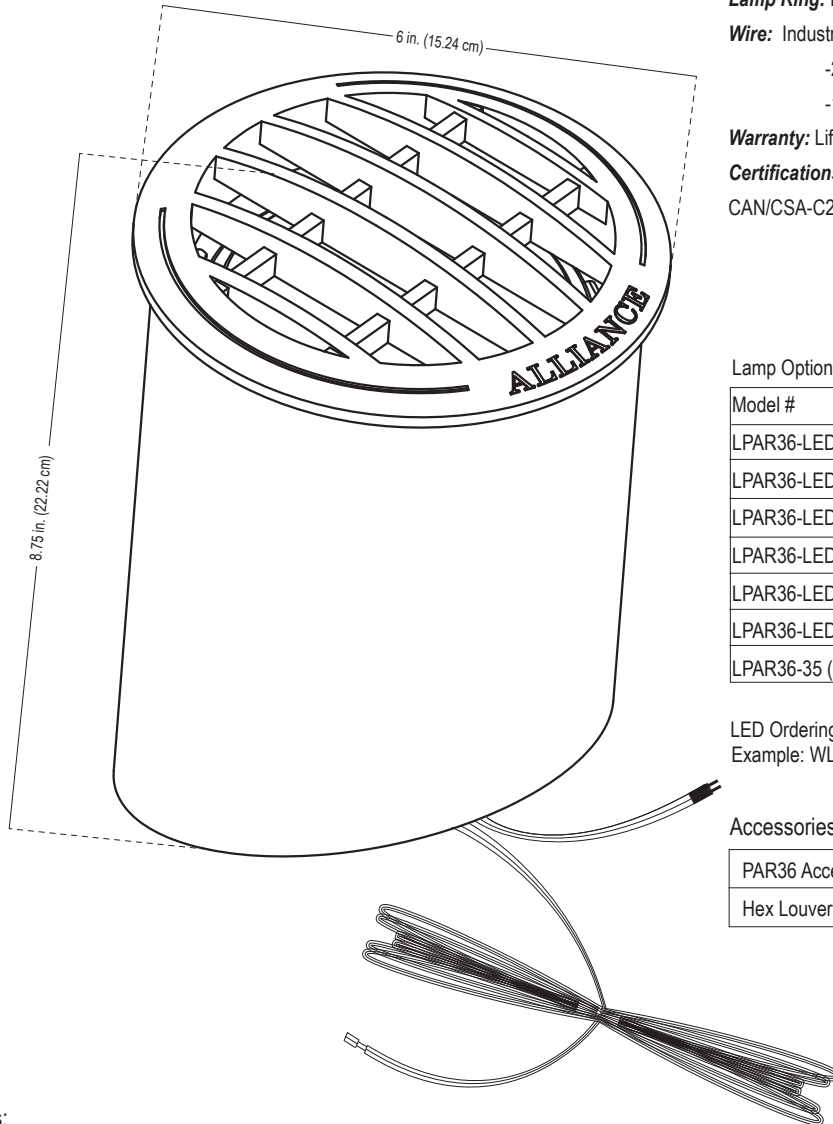

Notes:

Project:
Type:

Specifications and Features:

Grate: *Grate:* ABS grate, black, locks into can

Can: ABS housing, black, angled on one end

Socket: Spade connectors for LPAR36 connection

Lamp Ring: Lamp retainer ring, stainless steel

Wire: Industry First, double wire lead pre-connected to the fixture, 16 awg (*UL listed*), brown
 -25 foot wire lead, pre-stripped for easy wire connection
 -18 inch wire lead, LED connection ready

Warranty: Lifetime warranty on fixture housing

Certifications: Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL and cETL Listed Mark.



Lamp Options

Model #	Base Type	Angle	Wattage	Lumen Output
LPAR36-LED-4W-F	PAR36	20°	4w	250lm
LPAR36-LED-4W-WF	PAR36	40°	4w	250lm
LPAR36-LED-8W-F	PAR36	20°	8w	300lm
LPAR36-LED-8W-WF	PAR36	40°	8w	300lm
LPAR36-LED-10W-F	PAR36	30°	10w	400lm
LPAR36-LED-10W-WF	PAR36	45°	10w	400lm
LPAR36-35 (Halogen)	PAR36	45°	35w	300lm


LED Ordering Guide: Model-Lamp Wattage-Lamp Angle
 Example: WL100-LED-8W-WF

Accessories Available:


PAR36 Accessories:
Hex Louver

Project:
Type:


LPAR36 LED Photometric Comparisons

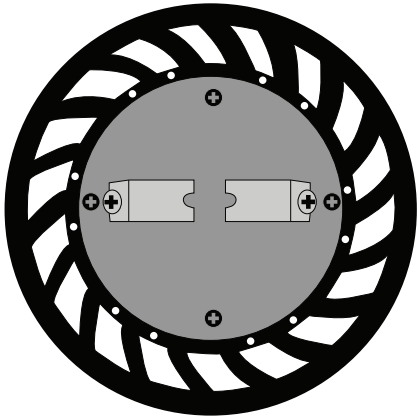




LPAR36-LED-4W-F

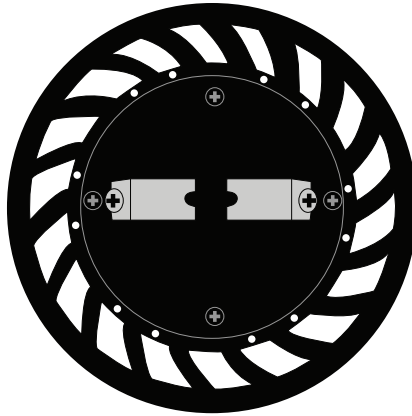


LPAR36-LED-8W-F

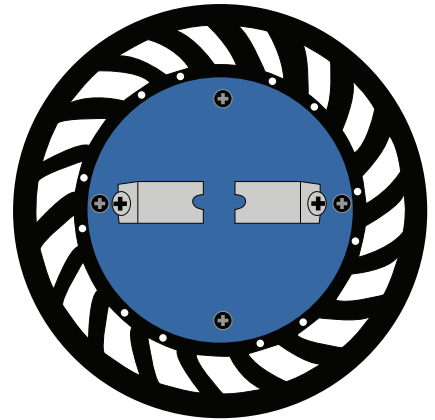


LPAR36-LED-10W-F

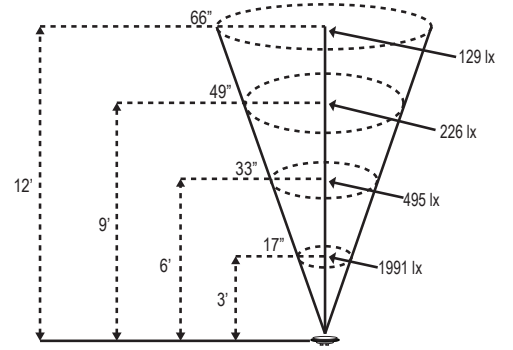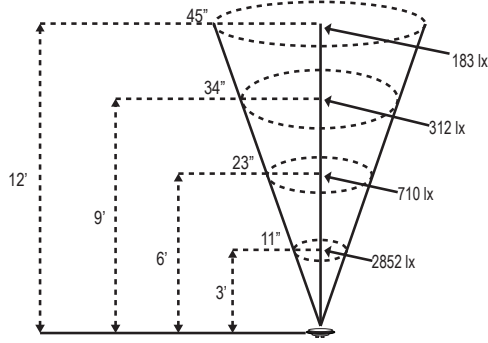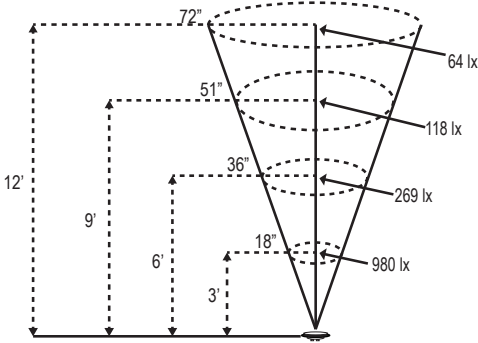

LPAR36-LED-4W-WF

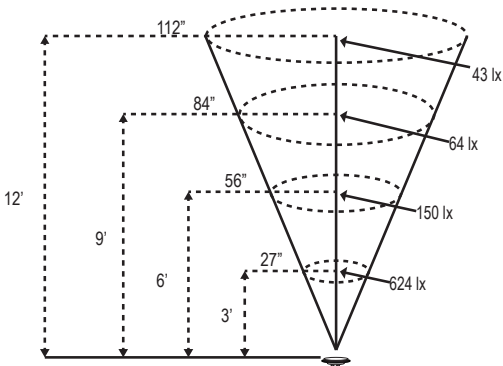

LPAR36-LED-8W-WF

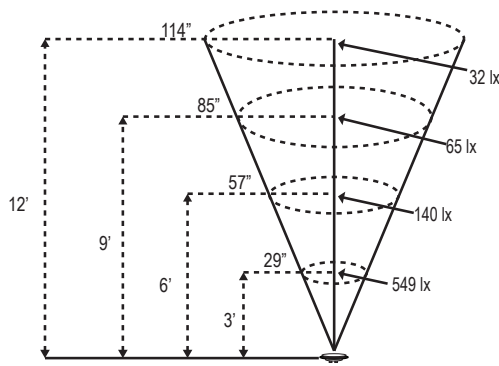

LPAR36-LED-10W-WF

